

REV.	DESCRIPTION	DATE
A	RELEASE	Dec 08, 2011
B	DRAW MODIFY	Jan 04, 2012
C	DRAW MODIFY	May 30, 2012


**MATERIALS:**


- HOUSING : L.C.P. (UL94V-0) BLACK.  
DVI COVER : L.C.P. (UL94V-0) BLACK.
- TERMINAL : BRASS, (t=0.3mm)  
GOLD PLATED ON CONTACT AREA,  
TIN PLATED ON SOLDER TAILS,  
NICKEL UNDER PLATED OVER ALL
- SHELL : SPCC, (t=0.50mm)  
NICKEL PLATED OVER COPPER UNDER PLATING.
- BOARD LOCK : SPCC, TIN PLATED OVER NICKEL. (t=0.50mm)
- COVER : STAINLESS STEEL, (t=0.30mm)
- SHELF : ZINC ALLOY, NICKEL PLATED.
- RIVET : ZINC ALLOY, NICKEL PLATED.





**SPECIFICATION**

- CURRENT RATING : 1.5 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
- CONTACT RESISTANCE : 30mΩ MAX.
- INSULATION RESISTANCE : 1000 MΩ MIN. AT 500V DC.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- MAX. PROCESSING TEMPERATURE :  
230°C FOR 30~60 SECONDS.  
260°C FOR 10 SECONDS.

**PART NUMBER INFORMATION :**

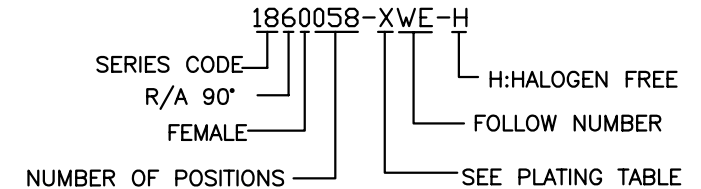

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	6	GOLD 30u"
3	GOLD 15u"		
<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		<b>DRAWER</b> <i>JAN 7 2012</i> <b>CHECK</b> <i>JAN 9</i> <b>APP'D</b> <i>B&amp;N</i> <b>PRODUCT SPEC.</b> —	
<b>UNITS : mm</b> SCALE NONE SIZE A4 SHEET 1 OF 1 REV. C		 <b>ASTRON TECHNOLOGY CORP.</b> <b>NAME</b> DVI +DVI DUAL PORT FEMALE (BLACK) <b>DRAW NO.</b> 1860058-XWE-H	
		<b>A0003</b>	

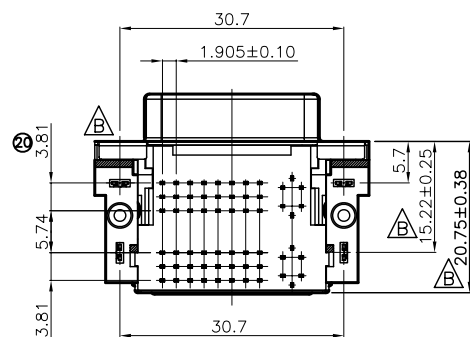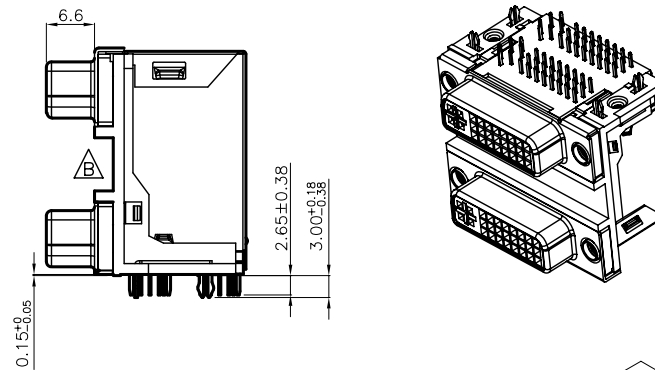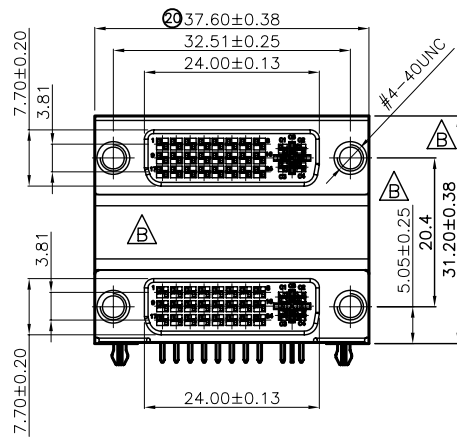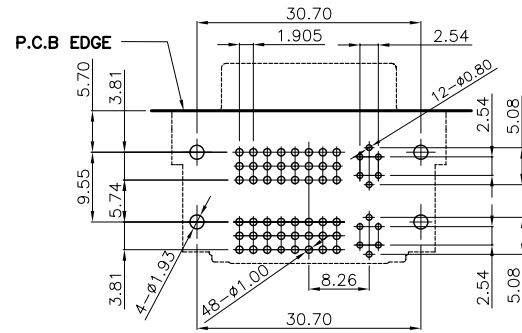

35 PCS/TRAY  
350/箱

