
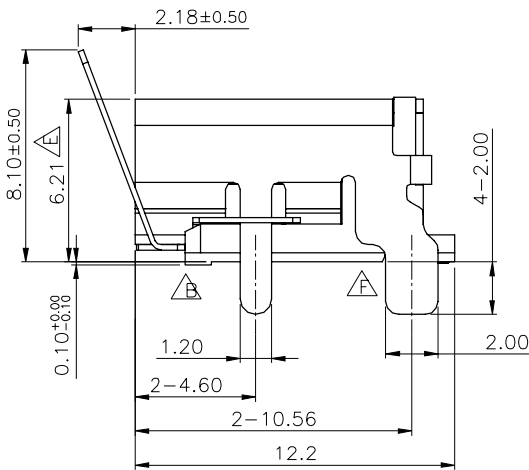


REV.	DESCRIPTION	DATE
F	N15'01022	Jan.30, 2015
G	N15'07014	Jul.07, 2015
H	N15'07011	Jul.11, 2016
J	N18'03008	Apr.12, 2018


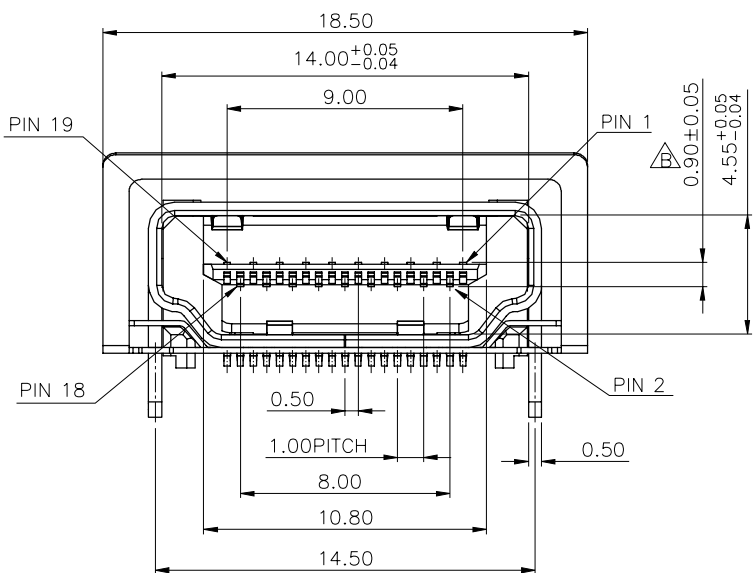


**MATERIALS**

1. HOUSING: THERMOPLASTIC (UL 94V-0),BLACK
2. TERMINAL: COPPER ALLOY,  
PLATING: GOLD PLATED OVER NICKEL ON CONTACT AREA AND TIN PLATED OVER NICKEL ON SOLDER TAILS.
3. SHELL: COPPER ALLOY.  
PLATING: NICKEL PLATED OVERALL.
4. SPRING: STAINLESS STEEL

**SPECIFICATION**

1. CURRENT RATING: 0.5A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC R.M.S. FOR ONE MINUTE(UNMATED).
3. INSULATION RESISTANCE: 100MΩ MIN AT 500V DC(UNMATED).
4. OPERATING TEMPERATURE: -25°C TO +85°C.
5. DURABILITY: 10000 CYCLES.

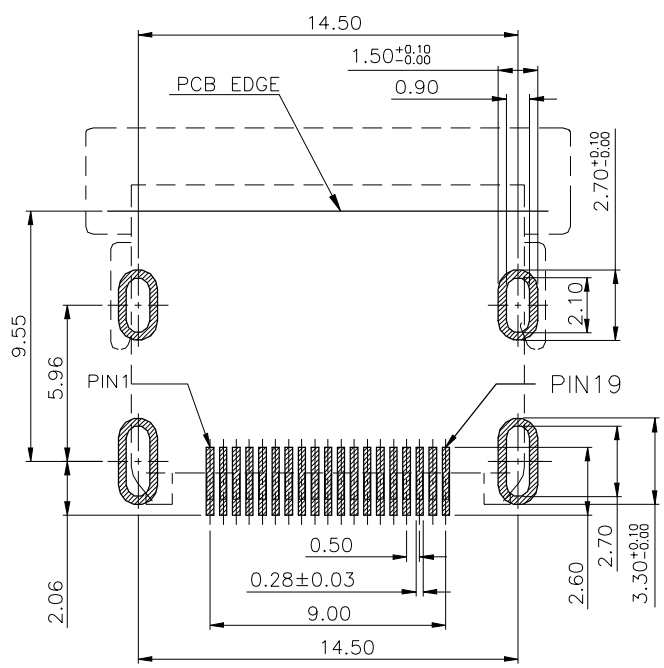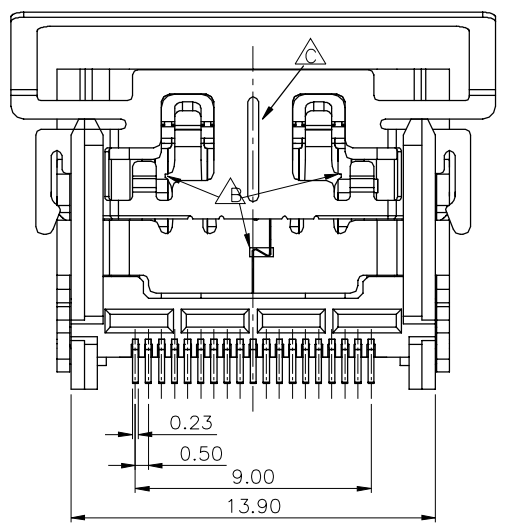

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW

**PART NUMBER INFORMATION :**






369FA19-XN101D-X

SERIES CODE: 369FA19  
SMT  
FEMALE  
A TYPE  
NUMBER OF POSITIONS: 19


XN101D-X  
R:RoHS  
H:HALOGEN FREE)  
FOLLOW NUMBER  
SPRING  
SHELL PLATING:  
NICKEL PLATED OVERALL  
CONTACT PLATING:  
0: GOLD FLASH  
3: 15u" GOLD  
6: 30u" GOLD



TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER <i>Chan</i>		 ASTRON TECHNOLOGY CORP.
UNITS : mm		CHECK <i>Hony</i>		
SCALE NONE		APP'D <i>Hony</i>		NAME HDMI A TYPE FEMALE SMT TYPE W/SPRING
SIZE A7		PRODUCT SPEC.		DRAW NO. R369FA19-XN101D-X
SHEET 1 OF 2		REV. J		

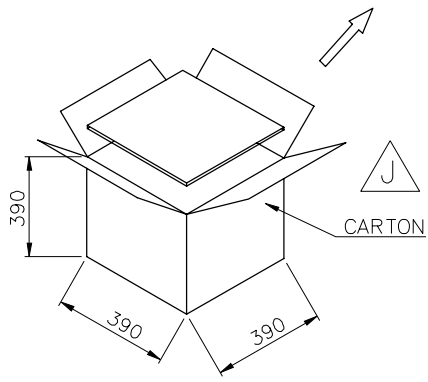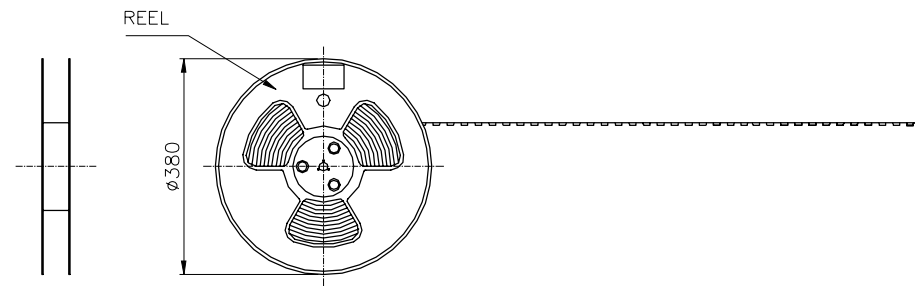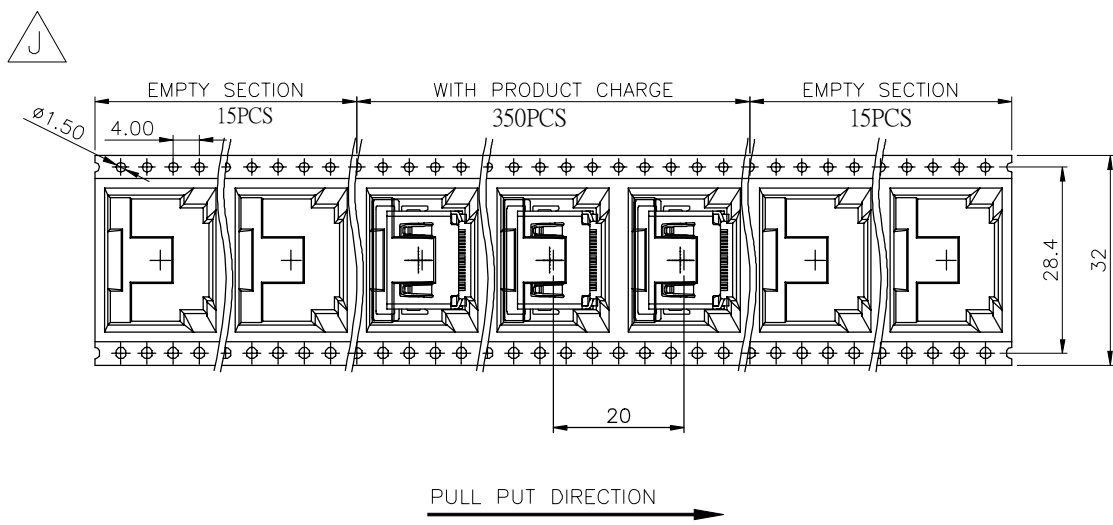REV	DESCRIPTION	DATE
F	N15'01022	Jan 30, 2015
G	N15'07014	Jul 07, 2015
H	N15'07011	Jul 11, 2016
J	N18'03008	Apr.12, 2018

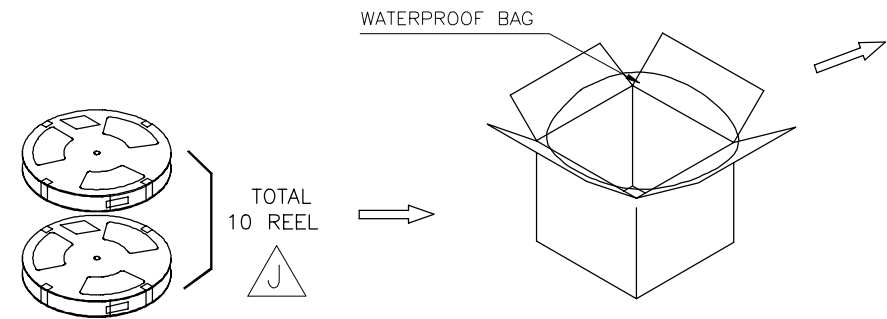

**TAPE & PACKAGE :**  
**MATERIAL :**  
 1. CARRIER TAPE : PS  
 2. COVER TAPE: PE  
 3. REEL : PS  
**QUANTITY:**  
 1. 350 PCS/REEL  
 2. 3500 PCS/CARTON



TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER <i>Chen</i>	 ASTRON TECHNOLOGY CORP. NAME HDMI A TYPE FEMALE SMT TYPE W/SPRING DRAW NO. R369FA19-XN101D-X
	CHECK <i>Stony</i>	
APP'D <i>Stony</i>	PRODUCT SPEC. —	
 UNITS : mm	SHEET 2 OF 2 REV. J	
SCALE NONE	SIZE A7	